


Hall effect Current Sensor

SCK25



Product description

Features

- Based on Hall effect measurement principle, open loop circuit mode.
- The isolation voltage between primary and secondary is greater than 3000VAC.
- Comply with UL94-V0 flame retardant rating.
- Standing and lying two installation methods.

Performance

- It can measure DC, AC, pulse, and various irregular waveform currents of cable conductors under isolation conditions.
- Wide measurement range, fast response speed, low zero drift, low temperature drift, high accuracy and good linearity.
- Dynamic performance (di/dt and response time) is optimal when the busbar is fully filled with primary perforations.
- Strong ability to resist external electromagnetic interference (BCI, EFT, CS, CE, ESD, dv/dt, etc.).

Application

- It can be widely used in inverters, UPS, photovoltaic inverters, electric vehicle drives, high-frequency power supplies, inverter welding machines and other products.

Implementation standards

- GB/T 7665-2005
- JB/T 7490-2007
- JB/T 25480-2010
- JB/T 9473-2020
- SJ 20792-2000

Certification



Shenzhen SoCan Technologies Co.,Ltd

SoCan is committed to continuously improving product quality, and the company reserves the right to update its products.

www.szsocan.com

Technical Parameters

Model Parameters (25°C)	SCK25-					
	600A	800A	1000A	1200A	1500A	2000A
Primary Current (A) I_{PN}	600A	800A	1000A	1200A	1500A	2000A
Primary Current Max. Peak Value (A) I_{PM}	$\pm 1800A$	$\pm 2400A$	$\pm 3000A$	$\pm 3000A$	$\pm 3000A$	$\pm 3000A$
Output voltage (V) V_{out} @ $\pm I_{PN}$, $R_L=10K\Omega$	$\pm 4V \pm 1\%$					

Electrical Data

Item	Min.	Typical	Max.	Unit
Input power supply voltage range V_c ($\pm 5\%$) (Remark 1, Remark 2)	± 11	± 15	± 18	V_{DC}
Current consumption I_c	-	± 15	± 20	mA
Withstand resistance R_{INS} @500V DC	1000	-	-	$M\Omega$
Output voltage V_{out} @ I_{PN} , $R_L=10K\Omega$, $T_A=25^\circ C$	3.960	4.000	4.040	V
Output internal resistance R_{OUT}	-	102	-	Ω
Load Resistance R_L	1	10	-	$K\Omega$
Accuracy X @ I_{PN} , $T_A=25^\circ C$	-	± 1	-	%
Linearity ε_L @ $R_L=10K\Omega$, $T_A=25^\circ C$	-	± 0.5	-	% I_{PN}
Offset voltage V_{OE} @ $T_A=25^\circ C$	-	± 10	± 20	mV
Hysteresis voltage V_{OM} @ $I_{PN} \rightarrow 0$	-	± 10	± 20	mV
Temperature Coefficient of Offset Voltage TCV_{OE}	-	± 0.5	± 1	mV/ $^\circ C$
Output voltage temperature coefficient TCV_{out}	-	± 0.05	± 0.1	%/ $^\circ C$
Response time t_D @ $0 \rightarrow I_{PN}$	-	3	5	μs
Ambient operating temperature T_A	-40	25	125	$^\circ C$
Ambient storage temperature T_s	-40	25	125	$^\circ C$
Withstand voltage V_D @50Hz, 60s, 0.1mA		3000		V_{AC}
Weight m		490		g

Remarks:

1. V_C is less than the minimum value, which will lead to inaccurate measurement, V_C is greater than

Shenzhen SoCan Technologies Co.,Ltd

SoCan is committed to continuously improving product quality, and the company reserves the right to update its products.

www.szsocan.com

the maximum value, which may cause permanent failure of the measurement device.




2. When $\pm 12V < V_C < \pm 15V$, the measurement range will be reduced.

$$3. V_{OUT} = 4.04 * \frac{R_L}{102 + R_L} * \frac{I_P}{I_{PN}} + V_{OE}$$

4. Follow the speed $di/dt > 50A/uS$


Dimensions (in mm)

SCK25



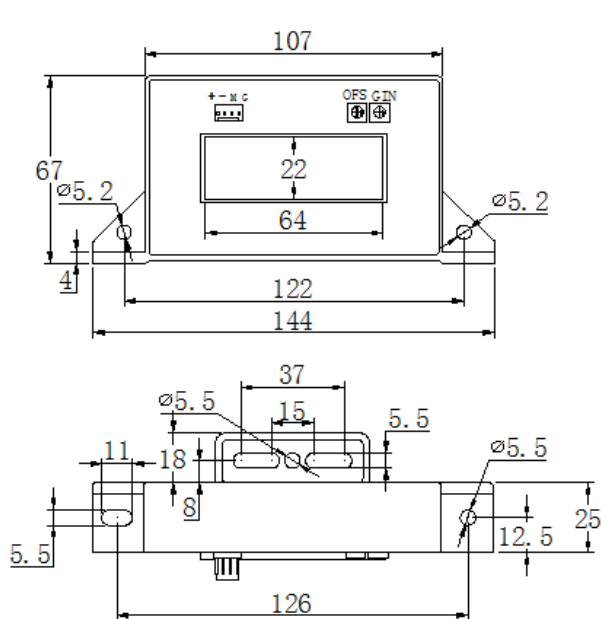


单位: mm

序号	标识	说明
1	+	+15V
2	-	-15V
3	M	Output
4	G	0V



SCK25T

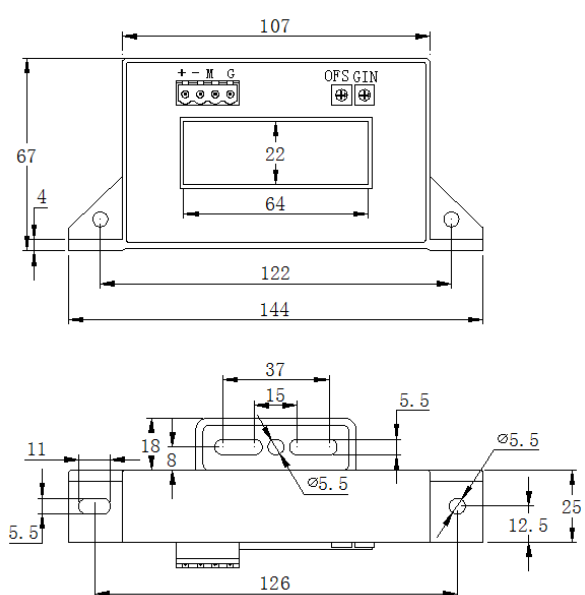

单位: mm

序号	标识	说明
1	+	+15V
2	-	-15V
3	M	Output
4	G	0V

Shenzhen SoCan Technologies Co.,Ltd

SoCan is committed to continuously improving product quality, and the company reserves the right to update its products.

www.szsocan.com

Notes:

1. Size error: $\pm 1\text{mm}$;
2. Primary aperture: $\square 64*22\text{mm}$;
3. Fastening hole: $\varnothing 5.5\text{mm}*2$;
4. K25 Output terminal: Molex 5045-04AG;
5. K25T output terminal: 2EDGVC-5.08-4P;
K25T mating plug: 2EDGK-5.08-4P;
6. The IP indication direction is the positive direction of the current, the OFS is the zero adjustment, and the GIN is the output regulation;
7. The temperature of the primary conductor shall not exceed 105°C ;
8. Incorrect wiring may cause damage to the sensor.